



DOUBLE WALL TRAILER

FUEL AND SERVICE TRAILER

STANDARD FEATURES

DOUBLE WALL FUEL TANK

- 10 Gauge Steel Tanks
- Lockable Enclosure for Pumps, Vents, Fill Ports
- 2" Roll Bar Around Tank, Vents and Fill Ports
- Tank Bolts to Chassis with Built-In Lift Points
- 110% Fuel Containment
- Outer Tank can be separated for Inspection
- 16" Manhole in Primary Tank for Inspection
- Emergency Shut-Off

TRAILER

- 7.5" x 1/4" Formed Frame
- Dexter® Torsion Axles and EZ Lube Hubs
- Electric Brakes with Breakaway Safety System
- 10-Ply Tires, ST235/80R16, Load Range E with Steel Wheels
- 7,000 lb. Enclosed Jack and Safety Tow Chains
- DOT Placards, Reflective Tape, LED Lights
- Replaceable, Bolt-on Fenders
- Dual Coat Gray Polyurethane Paint
- Replaceable Diamond Plate Rock Guard
- Adjustable Height 2 5/16" Ball Hitch
- Wiring Wrapped in Protective Braid

FRONT ENCLOSURE

- Automatic Interior LED Lighting
- 12V Deep Cycle Marine Battery
- Lockable Hatch-Style, Weather-Sealed Doors
- Fire Extinguisher

PUMP ENCLOSURE

- Fully Contained Pumping Area
- Lockable Hatch-Style, Weather-Sealed Doors
- Automatic Interior LED Lighting
- See Pumping System Options for Fuel Pump Configuration

OPTIONS

Items with + can be added any time to expand the functionality of the trailer as your operation grows.

TRAILER OPTIONS

- Aluminum Wheels
- 14-Ply Tires, ST235/85R16, Load Range G
- Custom Paint Color
- Solar Battery Maintainer +
- Electric/Hydraulic Jack +
- 100 Gallon DEF Delivery System (details below) +
- 30 Gallon Auxiliary Oil Tank and 3 GPM Pump +
- Gear Drive 8 GPM Pump Upgrade for Oil Tank
- Five Drawer Tool Chest for Front Enclosure +
- Spill Containment Kit +
- Static Discharge Reel +
- Stationary Side Step +

REAR UTILITY BOX OPTIONS*


- Rear Utility Box (41.75"d x 58.75w x 49.75"h)
 - Five Drawer Tool Chest for Utility Box +
 - Can+Towel Holder +
 - Two Drawer Low Boy Tool Chest +
 - Work Bench with Vise +
 - 35 lb. Grease Kit +
 - Welder+Comp+Gen with 50' Air/Elec. Combo Reel +
 - Comp+Gen with 50' Air/Elec. Combo Reel +
 - 35 CFM Air Compressor with 50' Air Hose Reel +
- *Available on DW990UB model only

DIESEL EXHAUST FLUID OPTIONS

- DEF Delivery System +
- 100 Gallon HDPE Tank
- Bi-Directional Pump
- 35' DEF Hose Reel
- Digital DEF Meter +
- 50' DEF Hose Reel
- 120V DEF Heater +



Fully Contained Pumping System

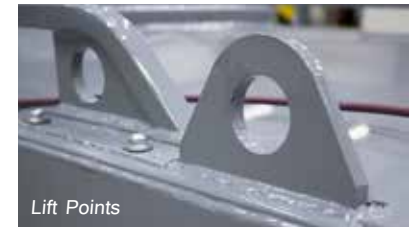

Lift Points



Dexter Torsion Axles



Manhole for Tank Inspection

SPECIFICATIONS

Shown with optional aluminum wheels

Model	DW990	DW990UB
Inner Tank	990 gallon four baffles 10 ga.	990 gallon four baffles 10 ga.
Outer Tank	7 & 10 gauge	10 gauge
Torsion Axles Hubs	dual 7,000 lbs. 8 bolt hubs	triple 6,000 lbs. 8 bolt hubs
L W H	19' 7' 6"	23' 7' 6'
Empty Weight* GVWR	5,400 lbs. 14,000 lbs.	6,500 lbs. 18,000 lbs.